


ELECTROLYSIS SYSTEMS DOCUMENTATION

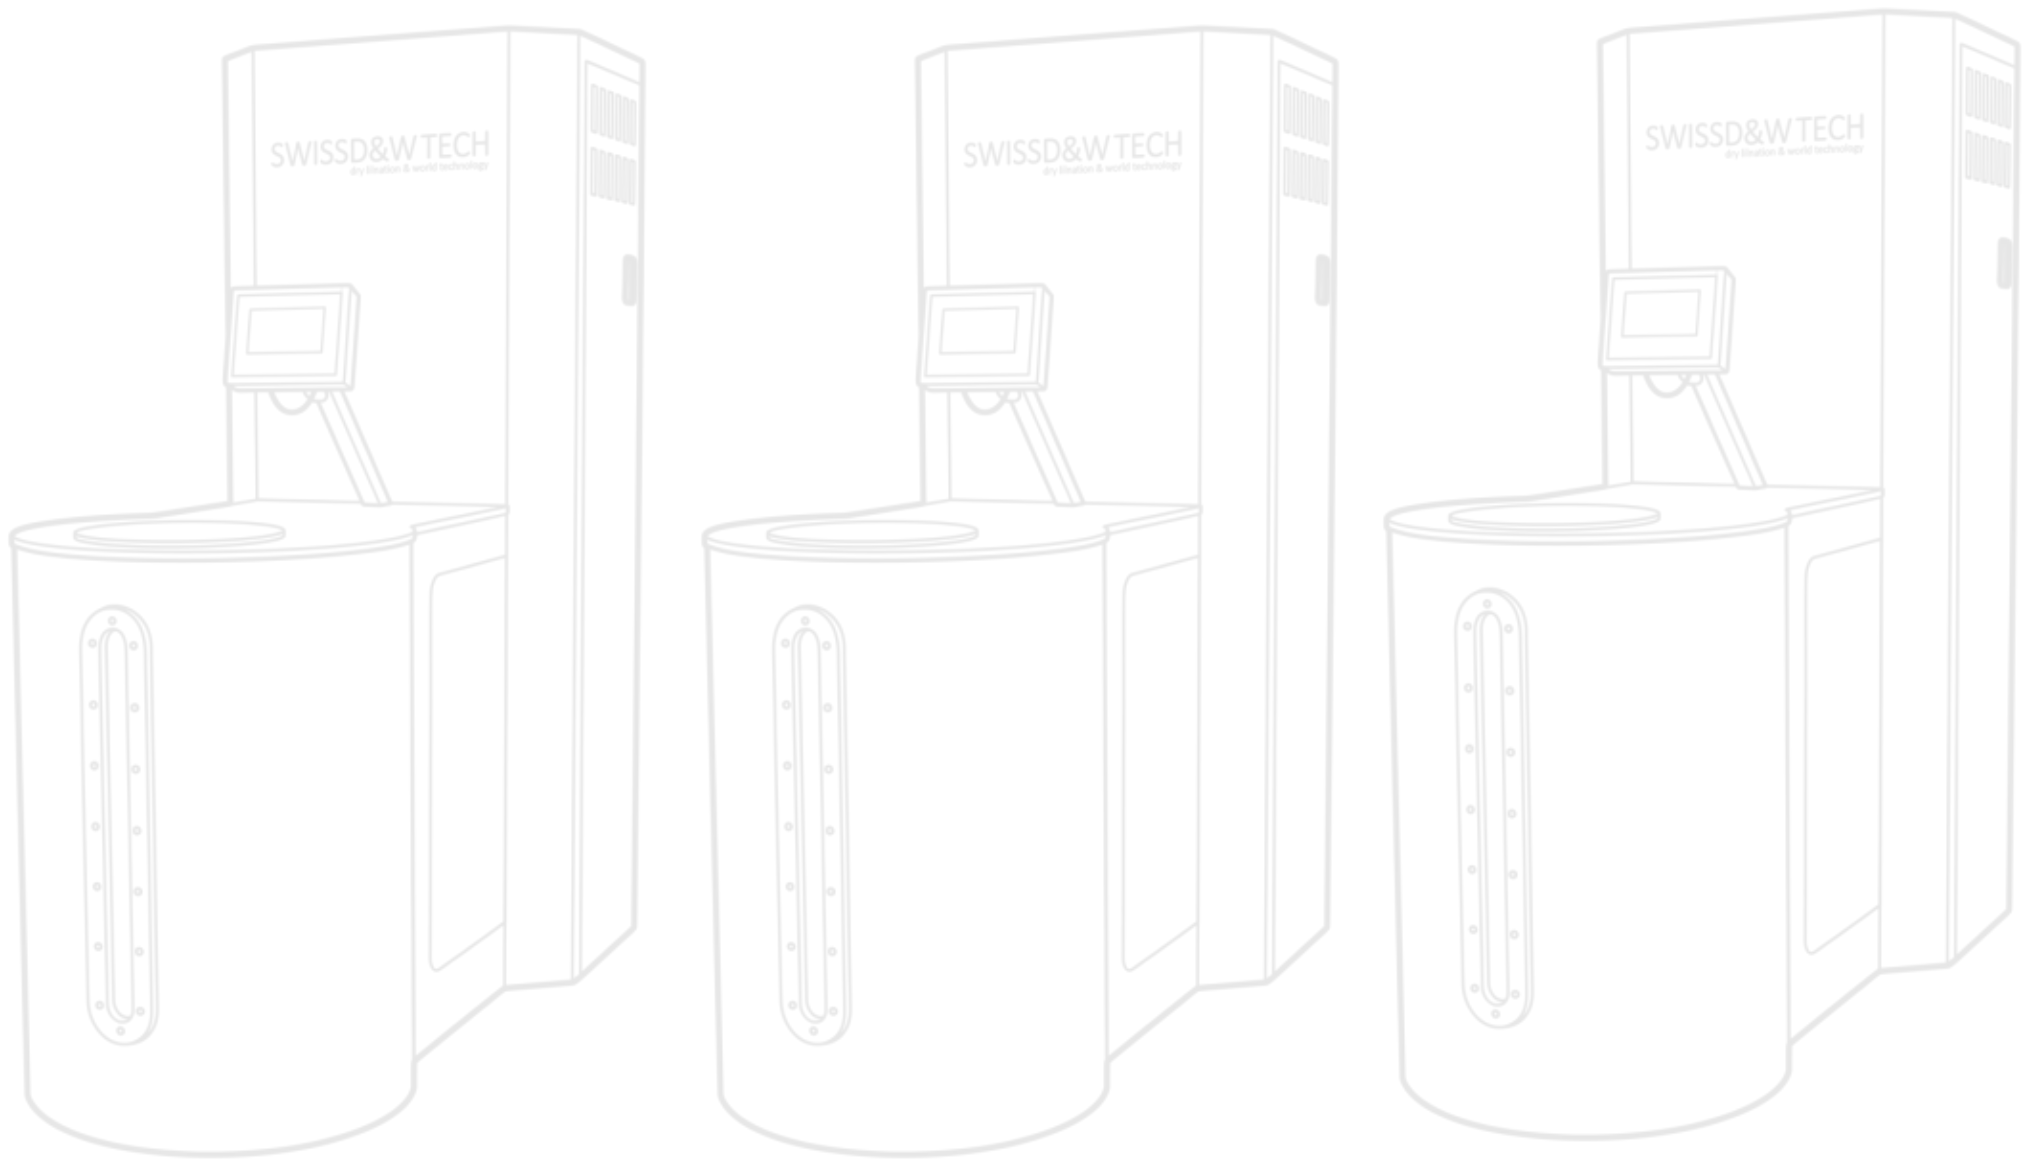

SDWT-2700 - SDWT-3600

SPECIFICATIONS

SPECIFICATIONS	SDWT-2700	SDWT-3000
Max. capacity g/Aktivchlor/h	ca. 2700	ca.3000
Max. capacity kg/Aktivchlor/day	ca. 65	ca. 72
chlorine concentration g/l	ca. 4	ca. 4
water consumption l/h	ca. 720	ca. 800
salt consumption in kg/kg chlorine	ca. 2.8	ca. 2.8
power connection	3 x 400V 50 Hz	3 x 400V 50 Hz
power consumption kWh/kg chlorine	ca. 4	ca. 4
power consumption kVa	ca. 27	ca. 30
dimension (BxTxH) mm	1300x1450x1950	1300x1450x1950
empty kg	ca. 750	ca. 800
Tank Capacity in kg Salt	ca. 500	ca. 500
hydrogen separator	Typ-XL	Typ-XL
chlorine outlet Ø in mm	2x 40	2x 40
water inlet Ø in mm	40	40
drainage Ø in mm	20	20
display size	7" Touch Display	
language	DE EN IT NL FR DK	

SPECIFICATIONS	SDWT-330	SDWT-3600
Max. capacity g/Aktivchlor/h	ca. 3300	ca.3600
Max. capacity kg/Aktivchlor/day	ca. 79	ca. 86
chlorine concentration g/l	ca. 4	ca. 4
water consumption l/h	ca. 880	ca. 960
salt consumption in kg/kg chlorine	ca. 2.8	ca. 2.8
power connection	3 x 400V 50 Hz	3 x 400V 50 Hz
power consumption kWh/kg chlorine	ca. 4	ca. 4
power consumption kVa	ca. 33	ca. 36
dimension (BxTxH) mm	1400x1450x1950	1300x1450x1950
empty kg	ca. 850	ca. 900
Tank Capacity in kg Salt	ca. 500	ca. 500
hydrogen separator	Typ-XL	Typ-XL
chlorine outlet Ø in mm	2x 40	2x 40
water inlet Ø in mm	40	40
drainage Ø in mm	20	20
display size	7" Touch Display	
language	DE EN IT NL FR DK	