


ELECTROLYSIS SYSTEMS DOCUMENTATION

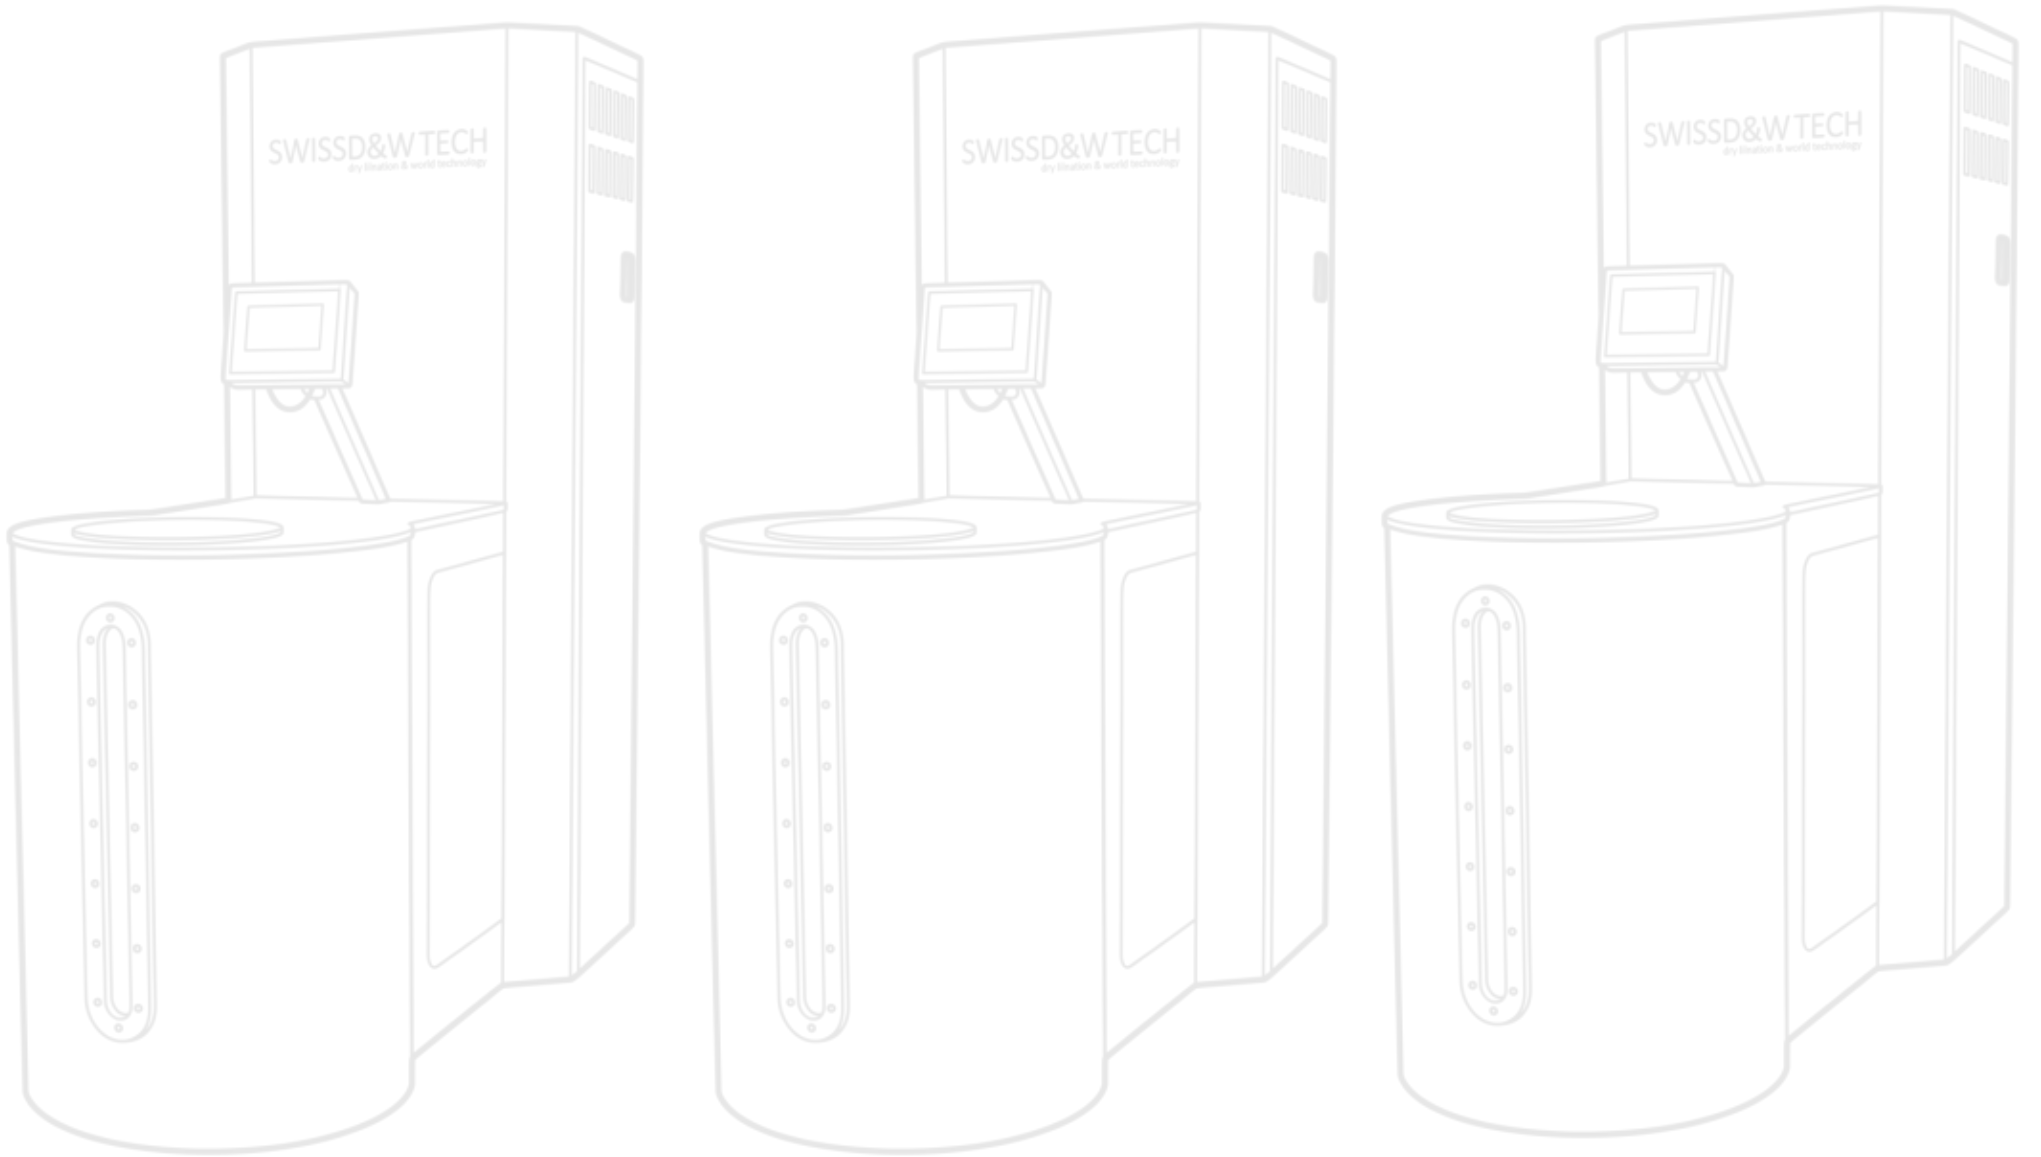

SDWT-400 - SDWT-1200

SPECIFICATIONS

SPECIFICATIONS	SDWT-400	SDWT-500	SDWT-600
Max. capacity g/Aktivchlor/h	ca. 400	ca. 300	ca. 300
Max. capacity kg/Aktivchlor/day	ca. 9.6	ca. 7.2	ca. 7.2
chlorine concentration g/l	ca. 4	ca. 4	ca. 4
water consumption l/h	ca. 160	ca. 80	ca. 80
salt consumption in kg/kg chlorine	ca. 2.8	ca. 2.8	ca. 2.8
power connection	3 x 400V 50 Hz	3 x 400V 50 Hz	3 x 400V 50 Hz
power consumption kWh/kg chlorine	ca. 4	ca. 4	ca. 4
power consumption kVa	ca. 4	ca. 5	ca. 6
dimension (BxTxH) mm	750x1600x1850	750x1600x1850	750x1600x1850
empty kg	ca. 250	ca. 250	ca. 250
Tank Capacity in kg Salt	ca. 350	ca. 350	ca. 350
hydrogen separator	Typ-M	Typ-M	Typ-M
chlorine outlet Ø in mm	25	25	25
water inlet Ø in mm	25	25	25
drainage Ø in mm	20	20	20
display size	7" Touch Display		
language	DE EN IT NL FR DK		

SPECIFICATIONS	SDWT-750	SDWT-900	SDWT-1200
Max. capacity g/Aktivchlor/h	ca. 750	ca. 900	ca. 1200
Max. capacity kg/Aktivchlor/day	ca. 18	ca. 21.6	ca. 28.8
chlorine concentration g/l	ca. 4	ca. 4	ca. 4
water consumption l/h	ca. 240	ca. 240	ca. 240
salt consumption in kg/kg chlorine	ca. 2.8	ca. 2.8	ca. 2.8
power connection	3 x 400V 50 Hz	3 x 400V 50 Hz	3 x 400V 50 Hz
power consumption kWh/kg chlorine	ca. 4	ca. 4	ca. 4
power consumption kVa	ca. 7.5	ca. 9	ca.12
dimension (BxTxH) mm	750x1600x1850	750x1600x1850	750x1600x1850
empty kg	ca. 300	ca. 300	ca. 350
Tank Capacity in kg Salt	ca. 350	ca. 350	ca. 350
hydrogen separator	Typ-L	Typ-L	Typ-L
chlorine outlet Ø in mm	25	25	32
water inlet Ø in mm	25	25	32
drainage Ø in mm	20	20	20
display size	7" Touch Display		
language	DE EN IT NL FR DK		