
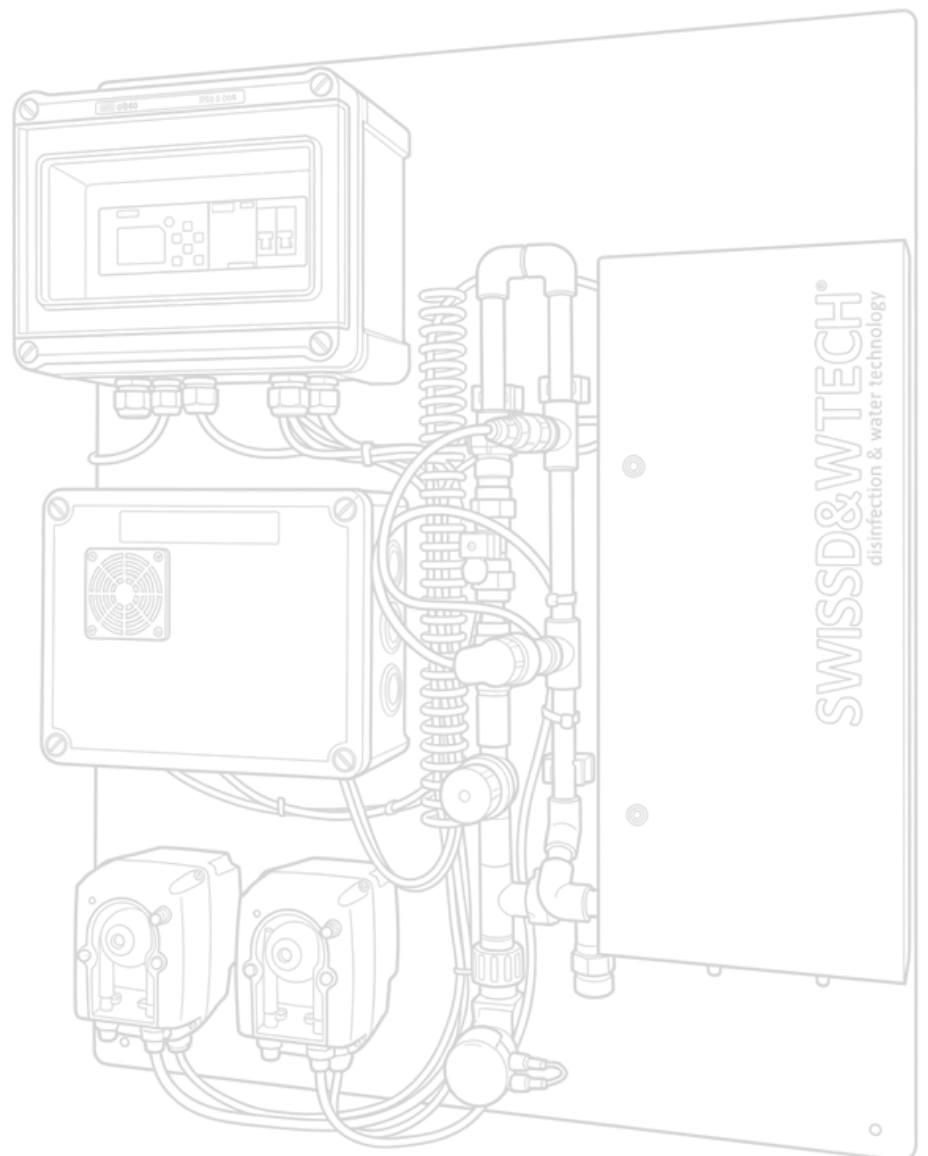


ELECTROLYSIS SYSTEMS DOCUMENTATION

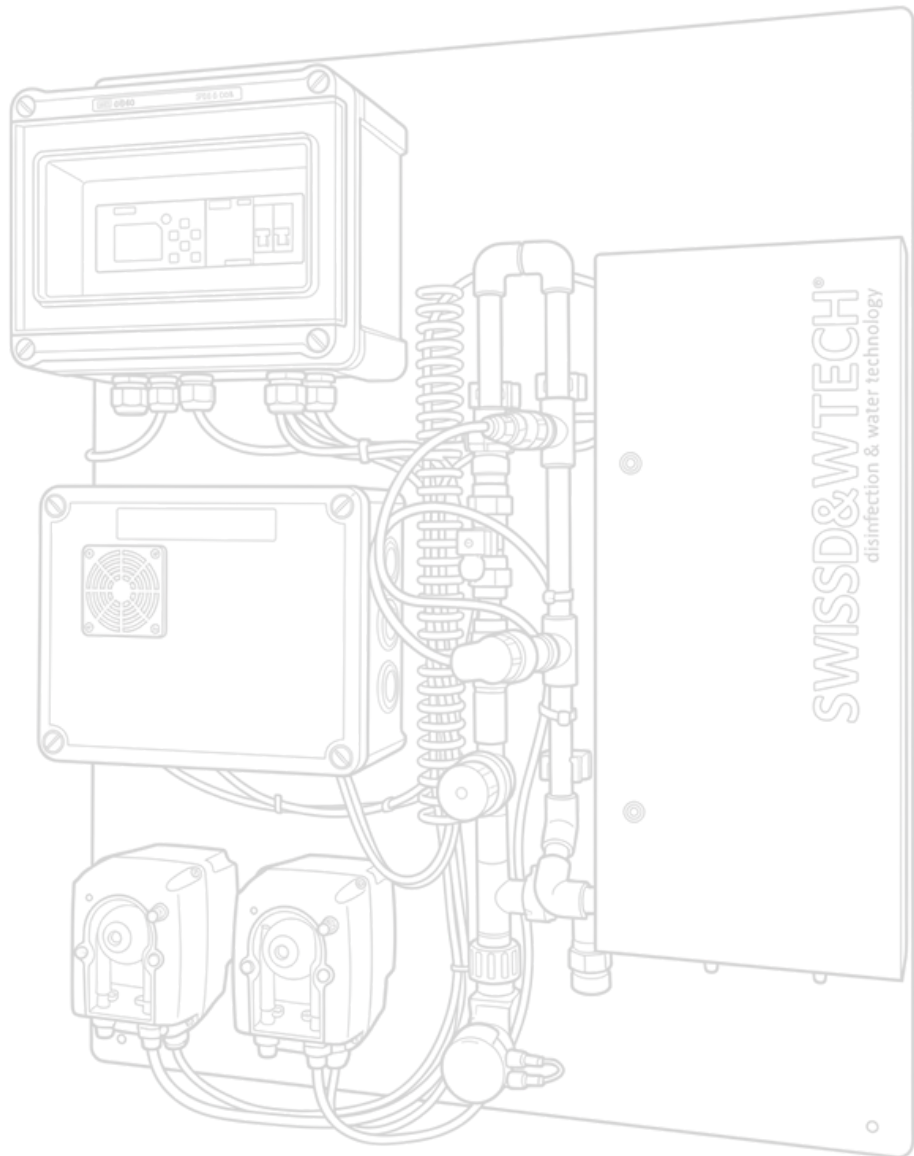

SDWT E-20 - SDWT E-100

SPECIFICATIONS

Specifications	SDWT E-20	SDWT E-30
Max. capacity g/Aktivchlor/h	ca. 20	ca. 30
Max. capacity kg/Aktivchlor/day	ca. 0.5	ca. 0.7
chlorine concetration g/l	ca. 2.5	ca. 2.5
water consumption l/h	ca. 20	ca. 20
salt consumption in kg/kg chlorine	ca. 2.8	ca. 2.8
power connection	230 V 50 Hz	230 V 50 Hz
power consumption kWh/kg chlorine	ca. 4	ca. 4
power consumption kVa	ca. 0.2	ca. 0.3
dimension (HxWxD)	750x600x160	750x600x160
empty kg	10	11
Tank Capacity in kg Salt	ca. 50	ca. 50
hydrogen separator	Typ S oder M	Typ S oder M
chlorine outlet Ø in mm	16	16
waterinlet Ø in mm	16	16
Display size	on CPU	
language	DE EN IT NL FR DK	

Specifications	SDWT E-50	SDWT E-100
Max. capacity g/Aktivchlor/h	ca. 50	ca. 100
Max. capacity kg/Aktivchlor/day	ca. 1.2	ca. 2.4
chlorine concetration g/l	ca. 2.5	ca. 2.5
water consumption l/h	ca. 20	ca. 40
salt consumption in kg/kg chlorine	ca. 2.8	ca. 2.8
power connection	230 V 50 Hz	230 V 50 Hz
power consumption kWh/kg chlorine	ca. 4	ca. 4
power consumption kVa	ca. 0.5	ca. 1.0
dimension (HxWxD)	750x600x160	900x800x160
empty kg	12	13
Tank Capacity in kg Salt	ca. 50	ca. 50
hydrogen separator	Typ S oder M	Typ M
chlorine outlet Ø in mm	16	16
waterinlet Ø in mm	16	16
Display size	on CPU	
language	DE EN IT NL FR DK	