


ELECTROLYSIS SYSTEMS DOCUMENTATION

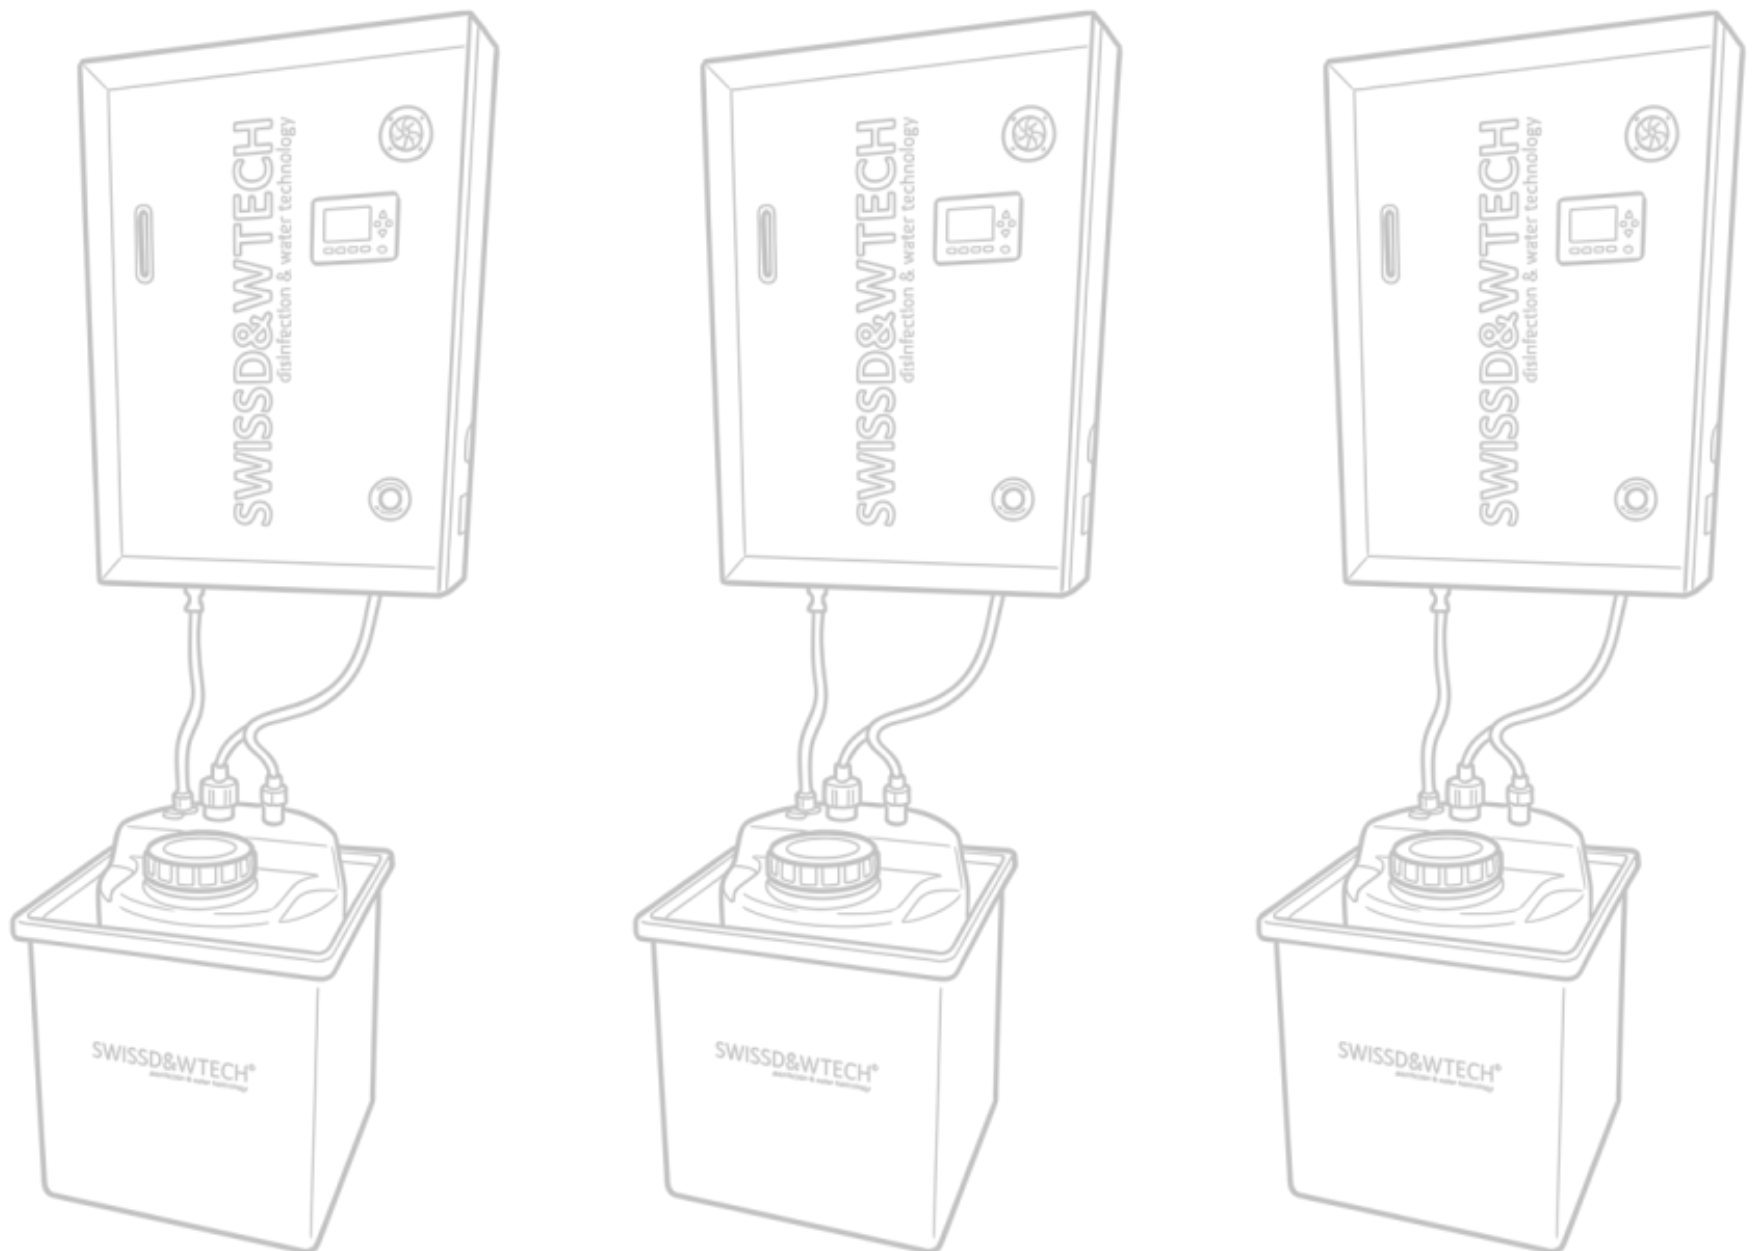

SDWT W-20 - SDWT W-50

SPECIFICATIONS

SPECIFICATIONS	W-20	W-30	W-50
Max. capacity g/Aktivchlor/h	ca. 20	ca. 30	ca. 50
Max. capacity kg/Aktivchlor/day	ca. 0.5	ca. 0.7	ca. 1.2
chlorine concentration g/l	ca. 2.5	ca. 2.5	ca. 2.5
water consumption l/h	ca. 20	ca. 20	ca. 20
salt consumption in kg/kg chlorine	ca. 2.8	ca. 2.8	ca. 2.8
power connection	230V 50 Hz	230V 50 Hz	230V 50 Hz
power consumption kWh/kg chlorine	ca. 4	ca. 4	ca. 4
power consumption kVa	ca. 0.2	ca. 0.3	ca. 0.5
dimension (BxTxH) mm	800x600x300	800x600x300	800x600x300
empty kg	ca. 30	ca. 30	ca. 30
Tank Capacity in kg Salt	ca. 50	ca. 50	ca. 50
hydrogen separator	Typ-S	Typ-S	Typ-S
chlorine outlet Ø in mm	16	16	16
water inlet Ø in mm	16	16	16
drainage Ø in mm	16	16	16
display size	3"	3"	3"
language	DE EN IT NL FR DK		