


PUMPS DOCUMENTATION

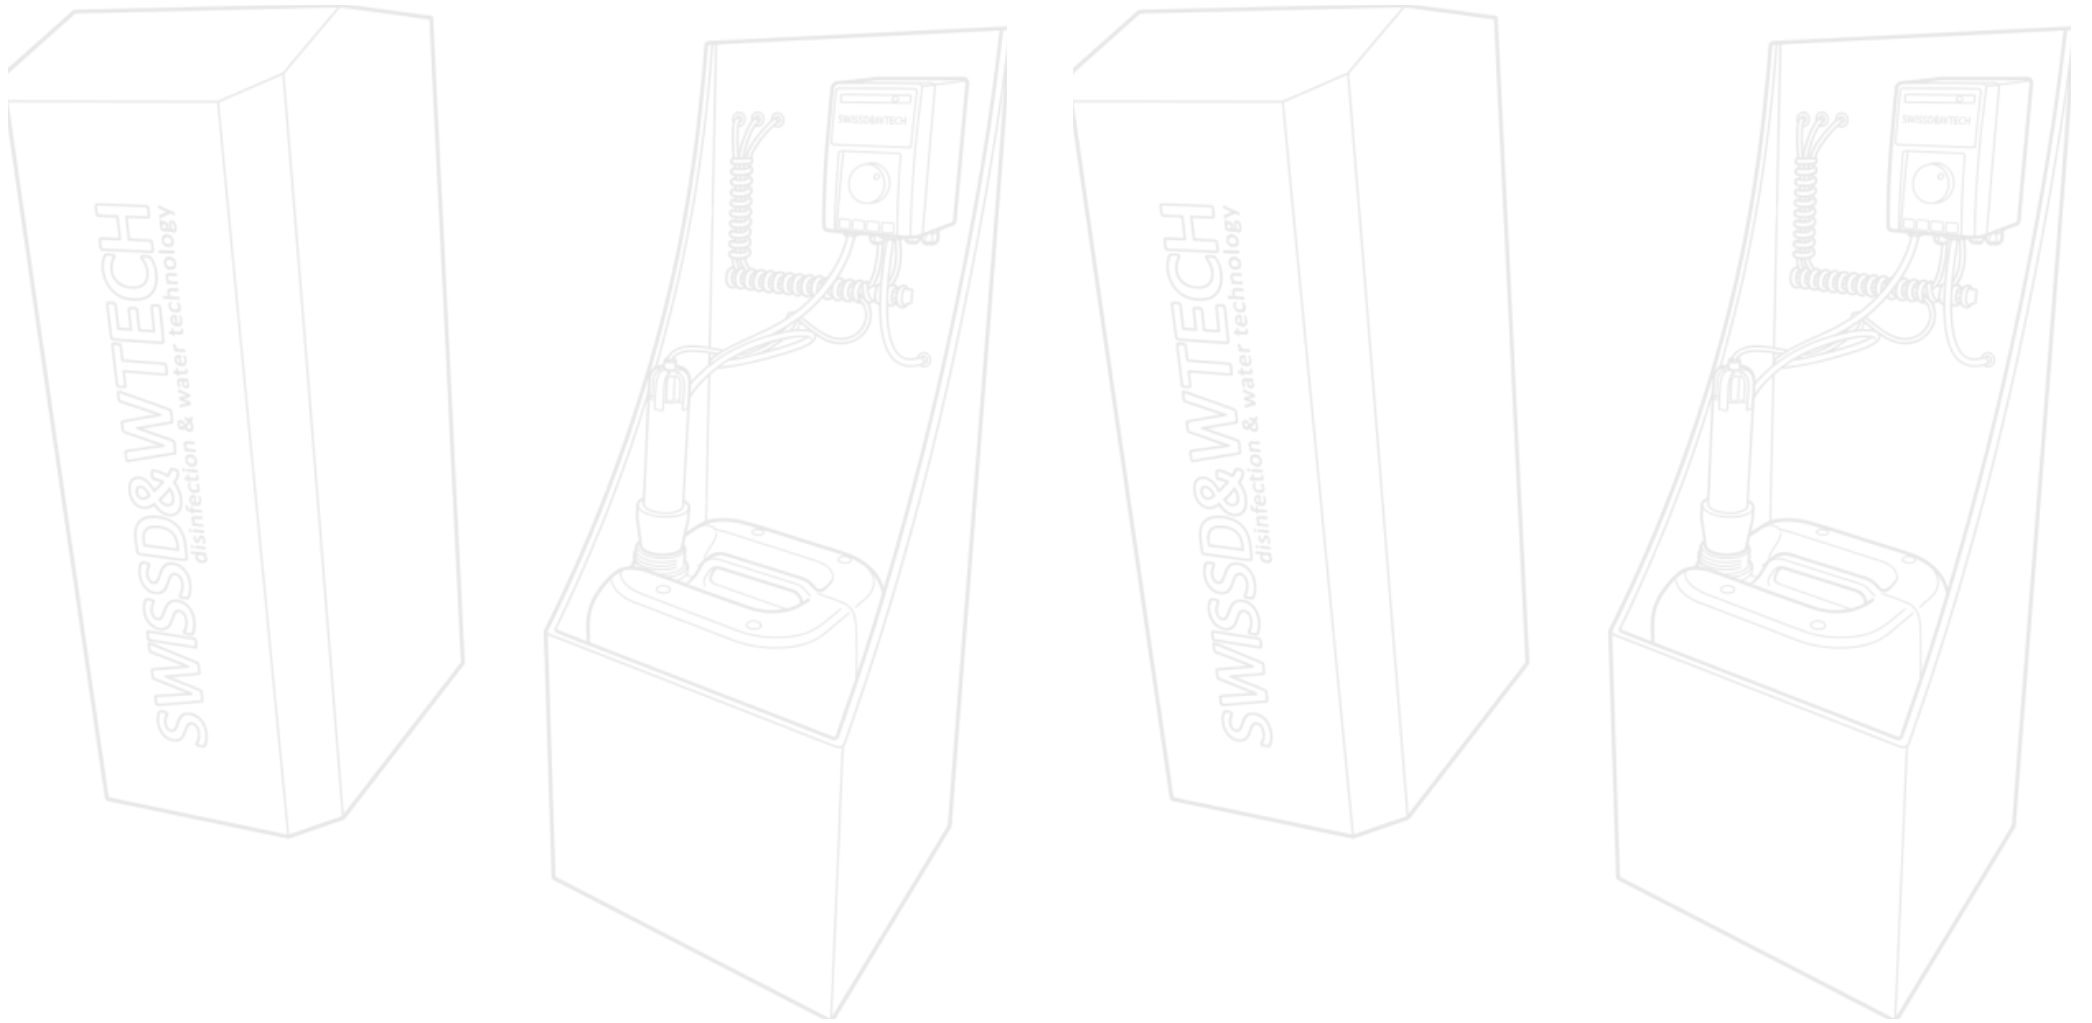

SDWT SULFURIC ACID DOSING STATION

SPECIFICATIONS

This system offers increased safety for people, animals and the environment, especially for private use.

The housing is manufactured in the same style and materials as our electrolysis systems and offers space for one or two 25 liter canisters and a maximum of 5 dosing pumps.

The dosing pumps for the cell cleaning and pH regulation of your pool are located here.

The suction lance has four outlets and a level monitor that can be connected to the electrolysis system. This way the power connection of the pump and level monitoring are ensured.

Technical specifications	Model for 1x25 l canister	Model for 2x25 l canister
Dimensions	(BxWxH) 380x430x1000 mm	(BxWxH) 680x430x1000 mm
Scope of delivery	1 x dosing pump 1 x Suction lance (525mm) 1 x Leakage sensor	2 x dosing pump 2 x Suction lance (525mm) 1 x Leakage sensor
Connections	24V or 230V	24V or 230V
Weight:	25 kg empty	45 kg empty

